

## ONELAN NET-TOP-BOX: PRODUCT LINE UP

<b>GENERAL</b>	<b>MILLENIUM</b> 	<b>CENTURY</b> 	<b>CENTURY</b> 
<b>TARGET APPLICATIONS</b>	Premium stand-alone appliance or Publisher for a Digital Signage Network	Simple stand-alone appliance or Subscriber in a Digital Signage Network	Simple stand-alone appliance or Subscriber in a Digital Signage Network

<b>COMMON FEATURES</b>	<b>NTB5500/5/8</b>	<b>NTB610/615</b>	<b>NTB510P/510S</b>
<b>Multi-Zone Media Player</b>	User defined number and position of Zones		
<b>Simple control</b>	Web interfaced appliance – no user software required		
<b>Full motion video</b>	MPEG1,2,4 (DivX), AVI, QT, live analogue or digital TV, analogue TV input [1]		
<b>Full Web page rendering</b>	HTML, JavaScript, Flash™, Real™		
<b>Stills, text, audio</b>	Stills - GIF, TIFF, JPEG, PNG. Text - scrolling or static, RSS feeds. Audio - MP3, WAV		
<b>High resolution output</b>	User definable. 4x3, 5x4 and 16x9 aspect ratios and resolutions		
<b>RSS Subscriber</b>	Automatically collect and display dynamic textural feeds from Internet or Intranet		
<b>Local media customisation</b>	Optionally allow a local user (given a password) to customise what's displayed		
<b>Linux based Player</b>	Network secure, in-built Firewall, high availability, no anti-virus software required		
<b>Unlimited network scalability</b>	Via ONELAN in-built 'Channel Manager' media distribution mechanism		
<b>Centrally manageable</b>	Via ONELAN Digital Signage Manager (DSM). 1000+ players		
<b>Streaming client options</b>	MPEG/UDP/IP & Web streaming client - chargeable option. Server option Millennium/Century		
<b>Self Health Monitoring</b>	For key physical parameters, capacities and loadings		
<b>Playout Logging</b>	For Audit Trail purposes		
<b>Multi-lingual</b>	International fonts and language specific Web GUI. English, French, German, Italian, Spanish, Russian, Chinese, Japanese, Arabic		


PRODUCT FEATURES	NTB5500 / 5505 / 5508	NTB610 / 615	NTB510P/510S
Per Zone transparency	Yes	Yes	Yes
Number of Zones	Unlimited - 4 Video*	Unlimited - 1 Video	Unlimited - 1 Video
Portrait mode	Yes	Yes	Yes
HD Media Player	Yes	No	No
Central Media Publisher	Yes	Yes	NTB510P
Local Layout editing / creation	Yes	Yes	Yes
Local Playlist editing	Yes	Yes	Yes
Video Zones	4 (*9 - optional)	1	1
HTML Zones	Unlimited	Unlimited	Unlimited
Text, Stills and Audio Zones	Unlimited	Unlimited	Unlimited
TV Capture + analogue TV input	No / Yes	No / Yes	No

HARDWARE SPEC.	NTB5500 / 5505 / 5508	NTB610/615	NTB510P/510S
CPU Class	Intel Pentium Core 2 Duo/	Intel Atom 1.6GHz	Intel Atom 1.6GHz
RAM	2048MBytes	1024MBytes	1024MBytes
Size (mm)	280x77x268	280x77x258	510 - 253 x 167 x 27
Mounting	Desktop or 2U Rack Mount – optional	Desktop or 2U Rack Mount – optional	VESA mount plate (supplied)
Display Output	VGA	VGA	VGA
Output resolution (maximum)	2048x1536	2048x1536	2048x1536
RS232	Yes	Yes	510 - Yes
Mains power supply / Consumption All 100-240 VAC 50-60Hz	180W Internal PSU with PFC / 55W	180W Internal PSU with PFC / 45W	100-240 VAC 50-60Hz via 36W mains to 12V adapter. Typical Consumption 12W
TV Capture + CVBS/Y-C input	No / Internal	No / Internal	No
Media Storage Type	HDD-3.5"-7200RPM-500G	HDD-3.5"-7200RPM-80G	510 - HDD-2.5"-5400RPM-160G or 32G Solid State Drive

#### Notes

1. Consult factory;

To find out more contact our appointed reseller/installer:

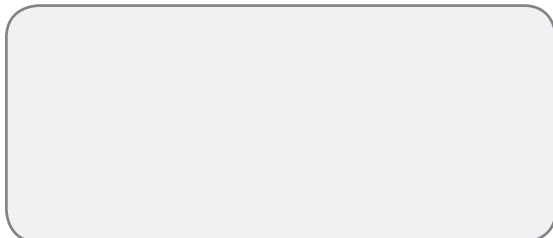

**ONELAN Limited**  
Andersen House,  
Newtown Road,  
Henley-on-Thames  
RG9 1HG, UK

Tel: +44 (0)1491 411 400  
Fax +44 (0)1491 579 254  
Email: info@onelan.com  
www.onelan.com